

DESCRIPTION

F.O.T. C-100 NEW GENERATION is a unique and sophisticated product, containing advanced organometallic compounds, specifically designed to increase fuel energy efficiency upon consumption and to reduce combustion deposits. This improved and more concentrated innovative formula combines superior quality ingredients, which result to its catalytic action as a fuel additive and deposit eliminator for all types of diesel engines that operate on heavy fuel oils.

F.O.T. C-100 NEW GENERATION is engineered to eliminate heavy metal depositions such as Vanadium, Sulfur, Lead contaminants in the fuel. These deposit eliminators are very effective in changing ash composition during their reaction with the heavy metals depositions. The reactions occurring lead to the prevention of low and high temperature acid corrosion on sensitive surfaces.

ADVANTAGES AND CHARACTERISTICS

- Very small dosage, highly concentrated and easy to dose and store.
- Reduces carbonaceous combustion deposits by increasing the combustion temperature enough to fragment and force them to pass out of the engines through burning with the fuel.
- Reduces heavy metal deposits such as Vanadium, Sulfur and Lead formed by poor quality heavy fuels in the same way as the carbonaceous combustion deposits.
- Improves performance in fuels with high CCAI.
- Preserves engine condition and especially vital parts such as the exhaust spaces, the valves, the turbochargers and engine heads from acid corrosion and carbon ash build-up.
- Increases fuel performance and efficiency, and as a result offers fuel consumption reduction.
- Reduces low and high temperature acid corrosion on sensitive surfaces.
- Completely soluble in fuel oil.
- Can be used with a specific range of other products.
- Easy to apply and use.

F.O.T. C-100 NEW GENERATION ™

PHYSICAL PROPERTIES

F.O.T. C-100 NEW GENERATION is a 100% oil-soluble, containing advanced organometallic compounds and deposit eliminators.

Appearance/Color : Dark Brown liquid

Specific gravity : 1.03 - 1.07 gr/cm³ at 20°C

Flash Point : 64°C

Odor : Aromatic Solvent Odor

PACKAGING

Order Number : 562513 (25 ltrs)

562113 (210 ltrs)

Container : Steel drum

APPLICATION AND USE

A. Dosing Procedure


The proportion of F.O.T. C-100 NEW GENERATION to be used is 1 litre for 12 - 15 cubic meters of fuel, depending on the nature and severity of the problem. This proportion can vary though, it can vary according to the quantity of the fuel to be treated and the operation handling procedures in progress.

B. Feeding Procedure

F.O.T. C-100 NEW GENERATION is in fed, at a continuous rate, into the service tank by means of a metering pump, as it can be seen in the below diagram points 3 and/or 4.



FUEL STORAGE AND SERVICE SCHEMATIC

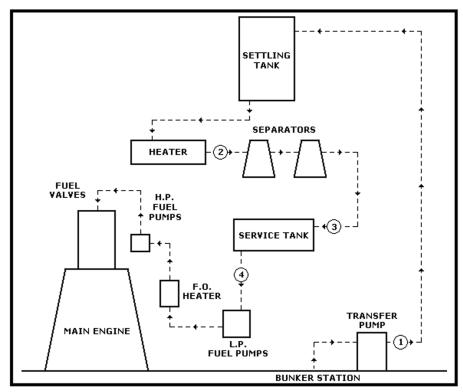

RECOMMENDED INJECTION POINTS FOR F.O.T. C-100 IN TYPICAL MAIN ENGINE FUEL ARRANGEMENT ① ② ③ ④

! SAFETY AND HANDLING

| HANDLING | Handle with care. Store in a dry, cool and well ventilated environment. |
|-------------------------|--|
| SAFETY | IMMEDIATE ACTIONS |
| Eye Contact | Avoid Eye contact. Otherwise, flush with plenty of water for a few minutes. Seek medical attention. |
| Skin Contact | Avoid Skin contact. Otherwise, wash contaminated area thoroughly with water. Seek medical attention. |
| Inhalation | Avoid inhalation of vapors. Otherwise, seek fresh air source at once. Seek medical attention. |
| If Swallowed | Avoid ingestion. Otherwise, consume a considerable quantity of water. Seek medical attention. |
| GENERAL INSTRUCTIONS | Avoid spillage, splashing and mishandling. Precautionary measures for body protection are strongly recommended before use. |
| | |

Read the Material Safety Data Sheet before using this product.

For detailed information on safety and health, please refer to Material Safety Data Sheet and/or Product Label.

MARICHEM MARIGASES Worldwide Services or any subsidiary or associated companies warranties of merchantability and competence, if any, along with any expressed warranties concerning this merchandise, shall not be actionable or pertinent or effective if the good is used contrarily or differently to the directions herein and in no other way due to impending hazards from inappropriate use of the good explained herein. Merchandise might vary insubstantially depending on country of origin. The information provided concerning merchandise is exclusively presented to the customer.